

For steel **corded synchronous belts or tension** measurement in steel cables.

Sensor Head Type: Magnetic Pickup


Type 11 Sensor Head



TECHNICAL SPECIFICATION

Environment Conditions	
Operating Temperature	+10°C to +50°C +50°F to +122°F
Shipping & Storage Temperature	+5°C to +70°C +23°F to +158°F
Protection Class	IP54
Sensor (Magnetic Pickup)	
Housing Cable length	Machined Aluminium (Anodised Natural) 1m

DIMENSIONS

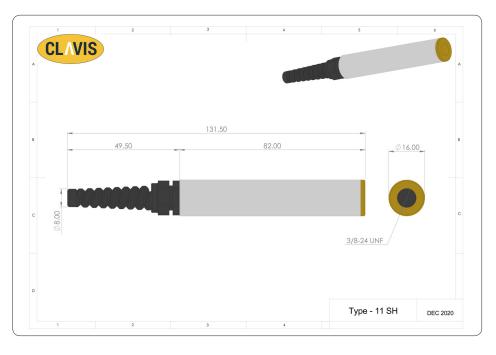





IDS INTEGRATED DISPLAY SYSTEMS LTD

Unit 4A New York Way New York Industrial Park Newcastle upon Tyne NE27 OQF, UK

admin@clavis.co.uk t: + 44 (0) 191 262 7869

www.clavis.co.uk